

# QUICK START GUIDE


## EVE AUDIO SC203 STEREO DESKTOP SPEAKER SET

English




### 1 PACKAGE CONTENT

- ▶ Master + Slave Monitors
- ▶ Stereo Link Cable
- ▶ External PSU
- ▶ 2 x FlexiPad
- ▶ Product manual

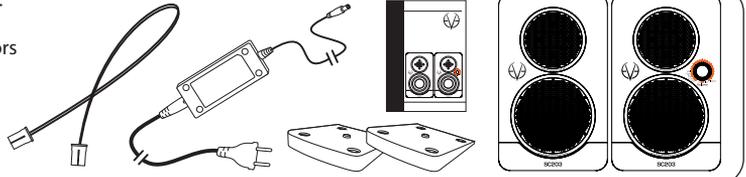


### 2 AUDIO CONNECTIONS

- ▶ Connect the signal source with either both analog RCA L/R ins, the digital optical input or the USB port.
- ▶ Link both SC203 Master and Slave monitors using the provided 4-pin connection cable.

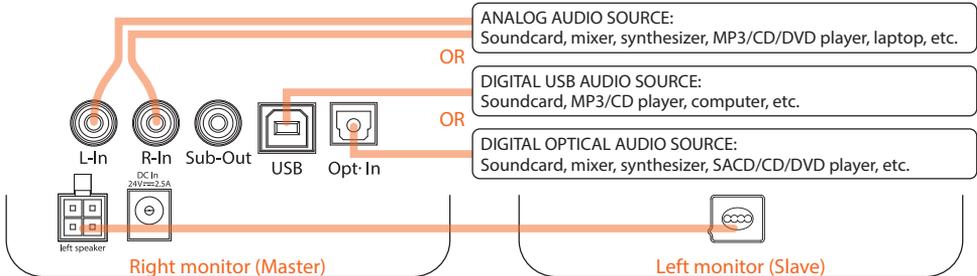


### 3 POWERING ON

- ▶ Connect the Master monitor (right speaker) to AC mains power using the provided external PSU.
- ▶ On the Master monitor rear panel, make sure that the Satellite filter DIP switch is in OFF position.

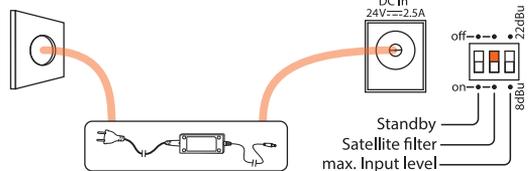


### 4 SELECTING INPUT

- ▶ Briefly push the front-panel encoder to switch the system on.
- ▶ Push the encoder to enter menu: "Bal" LED should blink.
- ▶ Turn the encoder clockwise until "Input" LED starts blinking.
- ▶ A constantly lighting LED shows the selected input. Turn the encoder to select the input connected to the signal source:
  - Top LED (#12) is lighting: Analog RCA L/R inputs
  - Next LED clockwise (#13) is lighting: Digital optical input
  - Next LED clockwise (#14) is lighting: USB port
- ▶ Push & hold the encoder for 3 sec. or don't touch it for 10 sec. to quit the menu.
- ▶ Turn the encoder to adjust the system volume and refer to the product manual to know everything on your SC203 system!

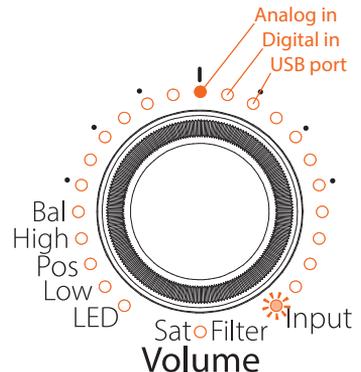

# 5 FRONT KNOB OPERATION

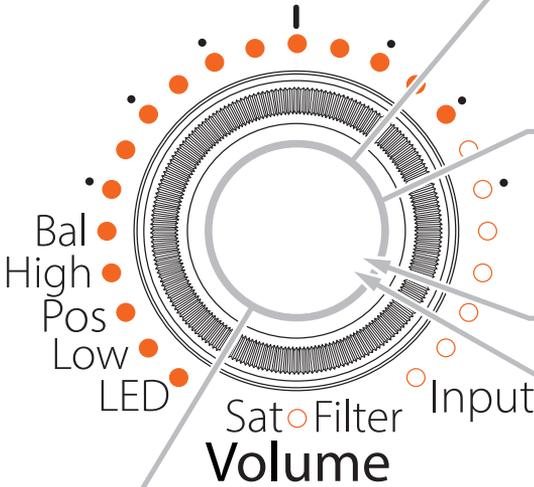

**5.1 VOLUME**

Turn > Volume setting  
LEDs > Volume setting

**5.2 STANDBY**

Push & hold (3 sec.)  
LEDs > Run counterclockwise

Push > Back to volume setting  
LEDs > Run clockwise

**5.3 FUNCTIONS**

Push > Enter function menu (LED mode, Low shelf, Position filter, High shelf, Balance, Input selection)

Flashing LED > Current function

Turn > Select function: LED, Low, Pos, High, Bal or Input

Flashing LED > Selected function

Push > Enter selected function

LED stops flashing > Current function  
2nd LED lights up > Current setting

Push > For further adjustments

No operation (10 sec.) > Back to volume setting

Push & hold (3 sec.) > Back to volume setting

Turn > Edit function setting  
2nd LED moves accordingly > Shows setting

## 5.4 LISTENING POSITION

Select the Pos(ition) setting depending on your listening position:

- Flat = LED #12 (stroke) is lighting
- Desk = LED #13 is lighting
- Console = LED #14 (4th dot) is lighting

