


### Active 2-Way Master/Slave Desktop Loudspeaker System



### Specification Chart


Dimensions (WxHxD)	116 x 190 x 134 mm	<b>User settings</b>		<b>Connectors</b>	
Dimensions (WxHxD)	4.56" x 7.48" x 5.27"	Volume	-inf. - +6dB	Left/right inputs	RCA (imp. 10kΩ)
Free-field freq. range 3dB)	62Hz - 21kHz	High-shelf filter (-5dB - +3dB)	> 3kHz	Digital optical input, 24bit/96kHz	TOSLink
Tweeter	µA.M.T.	Position	flat, desk, console	Class-compliant USB input, 24bit/96kHz	Type B
Mid-Woofer	75mm/3"	Low-shelf filter (-5dB - +3dB)	< 300Hz	Subwoofer output	RCA
Cross-over frequency	4800Hz	LED brightness setting		<b>Power consumption</b>	
Maximum SPL @ 1m	104dBspl	Input select	analog/optical/USB	Standby	< 1W
Number of amplifiers	4	Input level dip switch	+8dBu/+22dBu	Full output	110VA
Output power (woofer)	30W	Standby dip switch	locks cont. mode	<b>Misc.</b>	
Output power (tweeter)	30W	Satellite filter dip switch	80Hz HP filter	Mounting option	SC203 Mounting bracket
Protection	Limiter			Weight (Master)	1.9 kg / 4.19 lb
				Weight (Slave)	1.7 kg / 3.75 lb
				Weight (Flexipad)	0.86kg/0.19lb

### Packaging




Cardboard box dimensions (HxWxD):  
355 x 230 x 365 mm / 13.98" x 9.05" x 14.37"  
Total weight:  
5.3 kg / 11.7 lb.

### Frequency Response

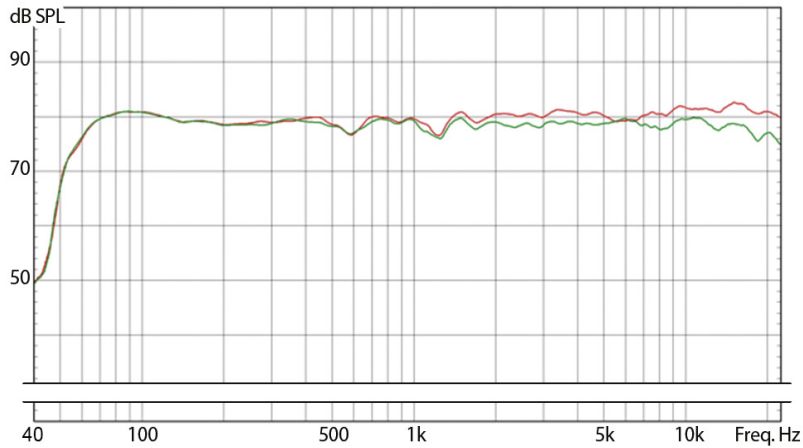

Free-field frequency response (@ 1m, 1/6 oct.): Red = 0° / Green = 30° horizontal off-axis


### Horizontal Dispersion

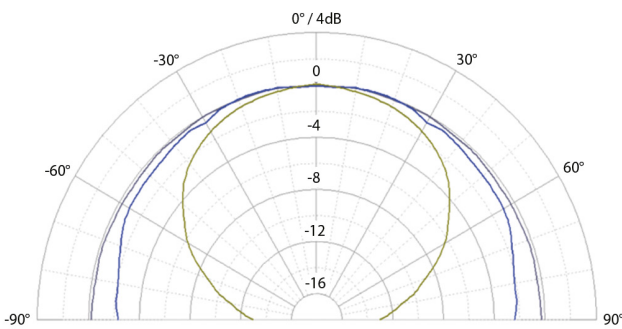

Polar pattern (1m)


Purple = 200Hz / Blue = 1kHz / Yellow = 5kHz

### Distortion

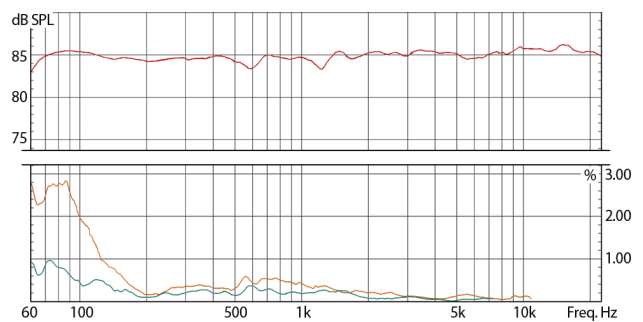


Distortion (@ 1m, full space): 2nd (orange) / 3rd (green) vs frequency response (red)


### Physical Data




Height & width



Depth



Acoustic center



Dispersion measurement plane